


7217

Incrément/pas
Inkrement/Schritt
Increment/step 0.042 mm


Diamètre
Durchmesser
Diameter 34 mm

Poids
Gewicht
Weight 72 g

Force max.
Max. Kraft
Max. force 45 N

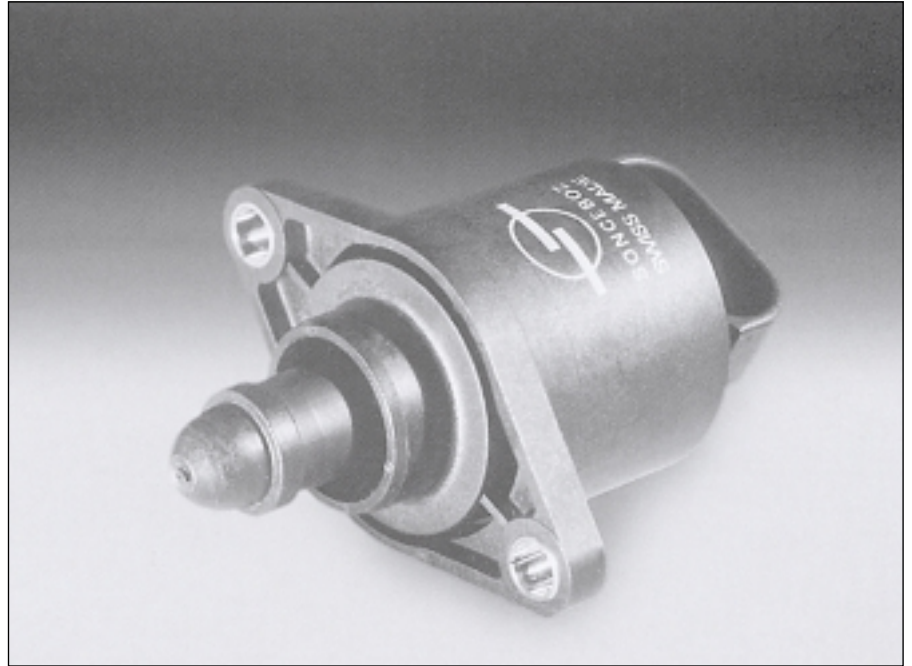


		Résistance de phase Phasenwiderstand Phase resistance Ω	Induct. de phase Phaseninduktivität Phase inductance mH	Courant de phase Phasenstrom Phase current mA	Puissance nominale Nennleistung Nominal power W	Tension de phase Phasenspannung Phase tension V	
bipolar	7217	51	38	180	3.3	9.2	

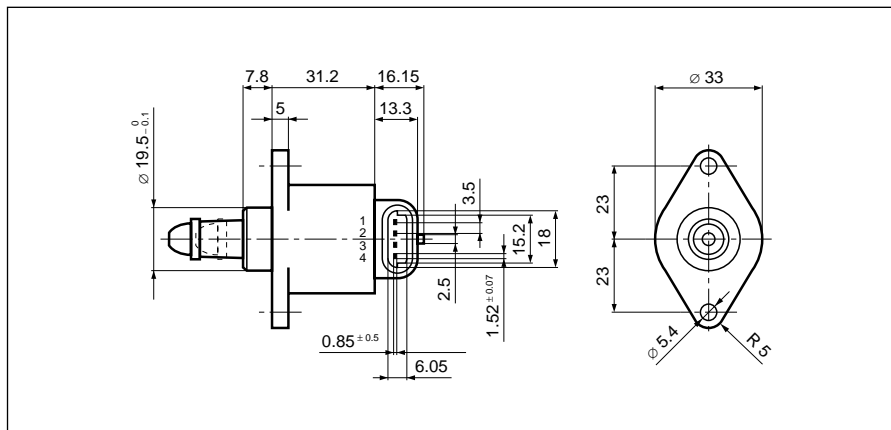

Course max. Maximaler Weg Max. travel length	8.5 mm
Classe d'isolation Isolationsklasse Insulation class	B 130 °C
Protection Schutzart Protection	DIN 40050 IP 65
Tension d'essai Prüfspannung Test voltage	500 VAC

Caractéristiques dynamiques
Dynamische Daten
Dynamic characteristics

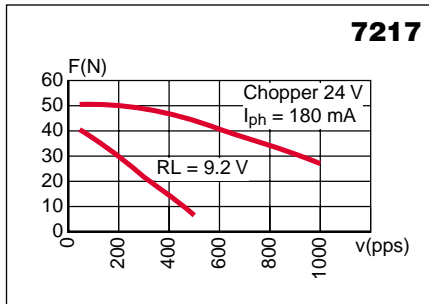

Possibilités d'exécutions adaptées sur demande.
Auf Wunsch werden kundenspezifische Anforderungen berücksichtigt.
Special requirements can be made to customer specification.

SONCEBOZ SA
CH-2605 Sonceboz
Tél: +41 32 488 11 11
Fax: +41 32 488 11 00
E-Mail: info@sonceboz.com
Internet: www.sonceboz.com

